

# GP Batteries

## DATA SHEET

Model No.: **GP1412AP**



### NO MERCURY ADDED

<b>Description</b>	: Alkaline-Manganese Dioxide Battery
<b>Dimensions</b>	: 48.4 mm x 35.5 mm x 9.2 mm
<b>Nominal Voltage</b>	: 6.0 Volts
<b>Average Weight</b>	: 30g
<b>Warranty Period</b>	: 12 months
<b>Operating Temperature</b>	: -20°C to 60°C (within 1 week)
<b>Application</b>	: Cameras

### Cross References:

GP	Duracell	Eveready	Neda	Ray-o-vac
1412AP	7K67	539	1412AP	867

### Typical Discharge Characteristics at 21°C

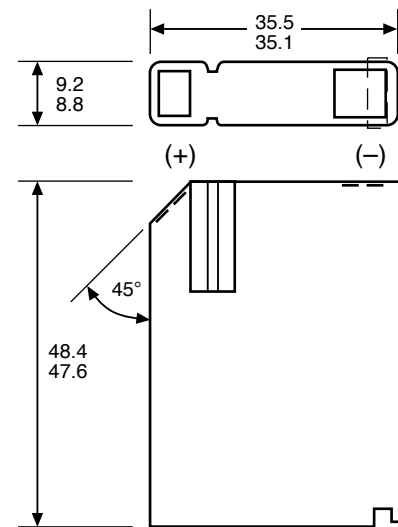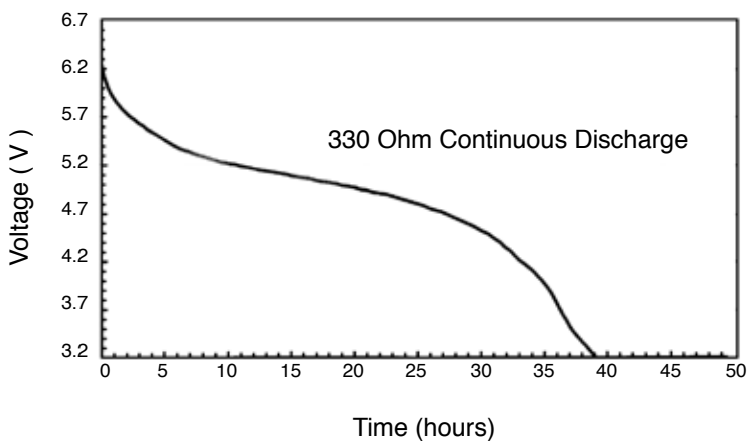


Unit : mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

[www.gpbatteries.com](http://www.gpbatteries.com)

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.  
Copyright© GPI International Ltd. - All rights reserved

 Member  
Gold Peak Group

05110111056