



<https://www.mega-piles.com/>


European Region
+ 44 1494 556111
www.energizer.eu

Eveready Silver AA (R6)

AA



Industry Standard Dimensions (millimeters)

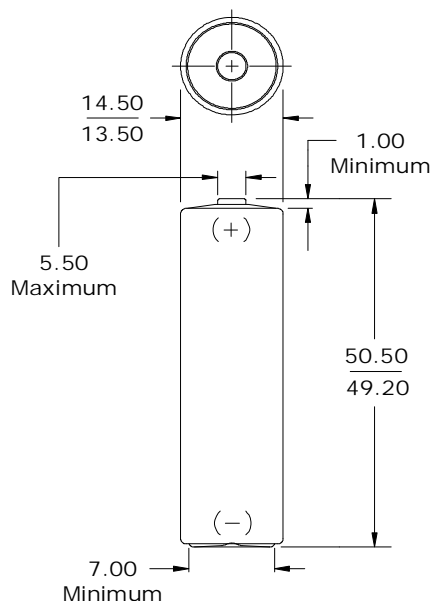

Specifications


Classification:	"Carbon Zinc" (Zinc Chloride)
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂)
	No Added Mercury or Cadmium
Designation:	IEC-R6
Nominal Voltage:	1.5 volts
Typical Capacity:	1,100 mAh* (to 0.8 volts)
Capacity Test:	25 mA continuous drain (21°C)

* Varies according to the applied load, temperature, and cutoff voltage.





Operating Temp:	-18°C to 55°C
Typical Weight:	15 grams
Typical Volume:	8.0 cubic centimeters
Jacket:	Metal

Storage/Capacity Characteristics

Effects of Storage at Various Temperatures

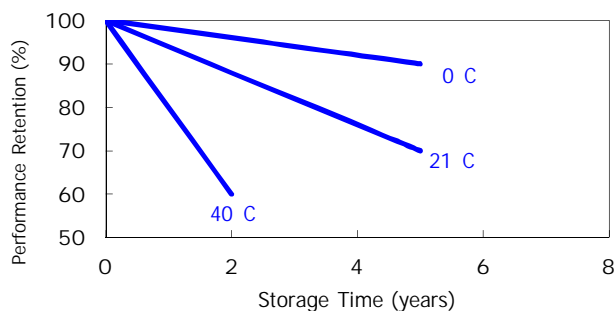

Industry Standard Tests (21°C)

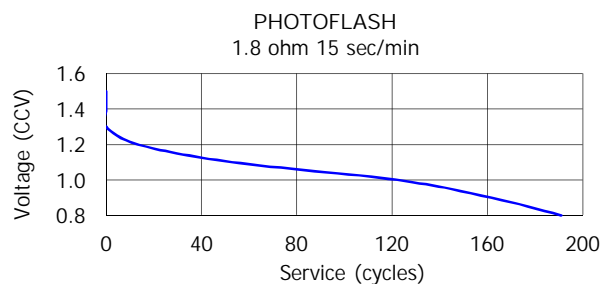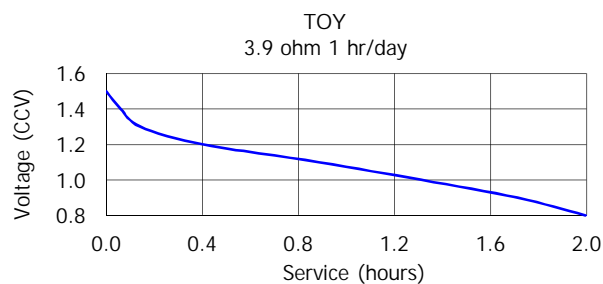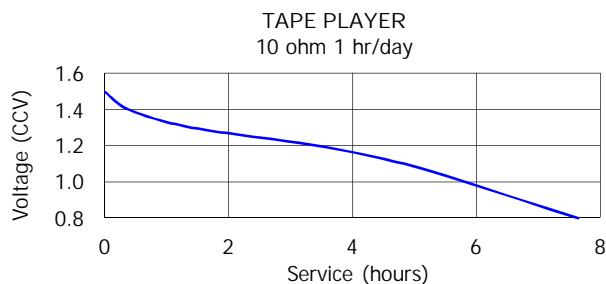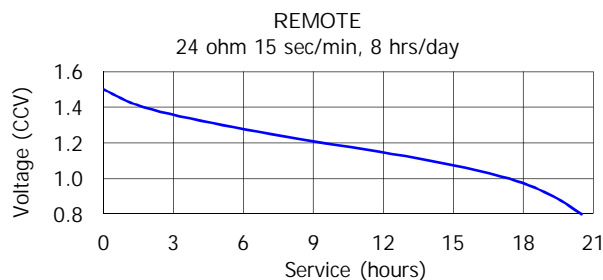

Important Notice

This datasheet contains information specific to battery chargers manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.