





<https://www.mega-piles.com/>

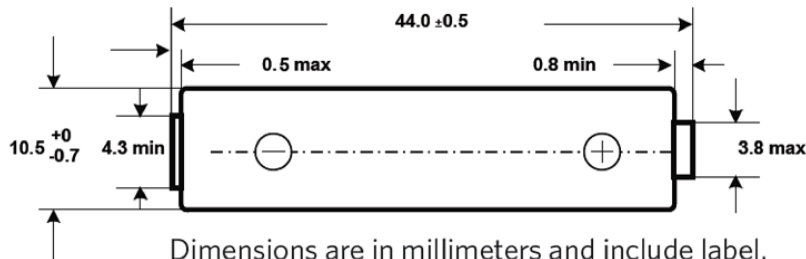

<b>Chemical system:</b>	Alkaline, MnO <sub>2</sub> / KOH / Zn
<b>Designations:</b>	IEC LR03, ANSI 24A
<b>Nominal Voltage:</b>	1.5V
<b>Nominal Capacity:</b>	1150 mAh at 75 Ohms to 0.8 Volts
<b>Internal Impedance:</b>	0.18 Ohms (typically)
<b>Average Weight:</b>	12 g
<b>Average Volume:</b>	3.8 cm <sup>3</sup>
<b>Recommended storage temperature:</b>	10 – 25 °C, RH no more than 75%
<b>Operating temperatures:</b>	-20 – 54 °C
<b>Reaction:</b>	2 MnO <sub>2</sub> + Zn + H <sub>2</sub> O → 2 MnOOH + ZnO
<b>Terminals:</b>	Flat contacts, protruding negative
<b>Jacket:</b>	Aluminium label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.9999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.



The Kodak trademark, logo and trade dress are used under license from Kodak.  
© 2021 STRAND EUROPE LTD.  
[www.kodakbatteries.strandeuroltd.com](http://www.kodakbatteries.strandeuroltd.com)