





<https://www.mega-piles.com/>

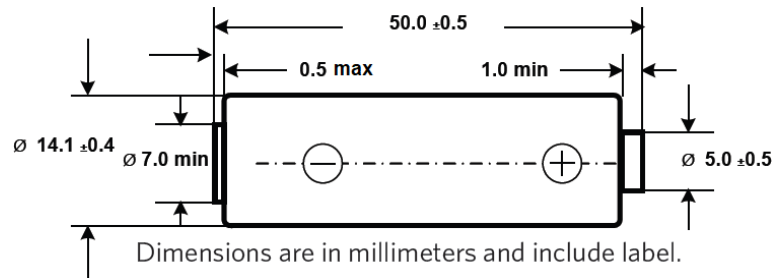

Chemical system:	Zinc Chloride, ZnCl ₂
Designations:	IEC R6, ANSI 15
Nominal Voltage:	1.5V
Nominal Capacity:	1050 mAh at 75 Ohm to 0.8V
Internal Impedance:	2.0 Ohms (max)
Average Weight:	12.8 g
Average Volume:	8.0 cm ³
Recommended storage temperature:	10 – 25 °C, RH no more than 75%.
Operating temperatures:	0 – 45 °C
Reaction:	2 MnO ₂ + Zn + H ₂ O → 2 MnOOH + ZnO
Terminals:	Flat contacts
Jacket:	Aluminium label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) SDS sheets are available on request from Strand Europe Ltd.



The Kodak trademark, logo and trade dress are used under license from Kodak.
 © 2021 STRAND EUROPE LTD.
www.kodakbatteries.strandeuropa.com