





<https://www.mega-piles.com/>

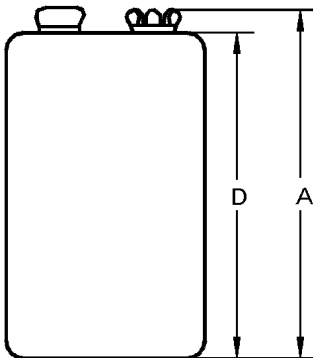

System

Shelf Life (Coding)\*

Nominal Voltage [V]

Typical Capacity C [mAh]

Permissible Temperature Range

Weight, approx. [g]

Lithium-Manganese Dioxide

10 years

9

1200 (discharge with high-resistance)

- 20 °C ... 60 °C

36,4

Dimensions [mm]

min: max:

A	46.5	49.0
D	-	46.4
E	12.45	12.95
O	24.5	26.5
P	15.5	17.5

**Typical Capacities (at 20°C)**

Discharge Type	Load	End Voltage[V]	7.8	7.5
24H/D,7D/H – 1S/1H,24H/1D	10000Ω 620Ω	Time [h]	1023	1120
		Capacity [mAh]	900	980
		Energy [mWh]	7883	8526
Smoke Detector				
Discharge Type	Load	End Voltage[V]	6.0	5.4
1H/D,7D/W	270 Ω	Time [h]	36,75	38,03
		Capacity [mAh]	1060	1087
		Energy [mWh]	8306	4188
Toy				
Discharge Type	Load	End Voltage[V]	6.0	5.4
2H/D,7D/W	620 Ω	Time [h]	85,26	87,22
		Capacity [mAh]	1112	1143
		Energy [mWh]	9221	9347
Radio				

**No publication or circulation of data to third parties without consent of VARTA Consumer Batteries**

\* In consideration of typical loss of capacity at storage and application.