


Data Sheet

Primary Silver

V 28 PX



<https://www.mega-piles.com/>

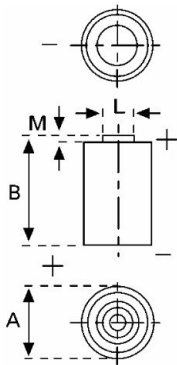

Type Number..... 4028
Designation IEC..... 4 SR 44
System..... Silver oxide/ Zinc /
 KOH - Electrolyte

Nominal Voltage..... 6,2 V
Typical Capacity C..... 145 mAh
 Load 20 kOhm, at 20°C down to 3.6 V

Weight (approx.)..... 11,1 g
Volume..... 3,3 ccm
Coding..... Manufacturing Quarter/Year
 by Letter Code

Temperature Ranges
 Storage..... min max.
 -10°C 65°C
 Discharge..... -10°C 65°C

Dimensions
 Diameter..... min max.
 12 13
 Height (A/B)..... 23,9 25,2

Segment..... Photo/High Drain

Main Applications..... Photo
 Electronic

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage: 3.6V
Continuous 24h/d, 7d/w Current [μ A]	20000 Ω 310	Time: 495 h Capacity [mAh]: 145 Energy [MWh]: 855

All Data contained herein is for single cells
 For battery applications, performance data may vary from single cell data, depending on specific battery configuration