

**battery type:** lithium primary battery  
**battery size:** CR-123A (CR-17345)  
**chemical system:** Manganese Dioxide Lithium Battery



<https://www.mega-piles.com/>

**nominal voltage:** 3.0 V  
**open circuit voltage:** 3.0...3.5 V  
**closed circuit voltage:** 2.9...3.4 V

**conditions, remarks**  
 new battery  
 measured after 1s under load of 50Ω

**capacity** measurements at 23°C ambient; new battery

**rated:** 1500 mAh discharge at 10mA constant; 24hours/day  
 End Voltage (EV): 2.0V

**minimum:** 1375 mAh discharge at 15mA constant; 24hours/day  
 End Voltage (EV): 2.0V




1000 mAh discharge at 1000mA constant; continuous  
 End Voltage (EV): 2.0V

**duration** new battery

**pulse load:** load: 900mA for 3s, rest time 27s  
 >1600 cycles at 23°C; End Voltage (EV): 1.55V

>1000 cycles load: 1200mA for 3s, rest time 7s  
 at 23°C; End Voltage (EV): 1.55V

**discharge diagrams**

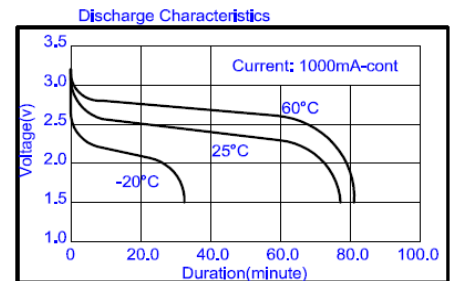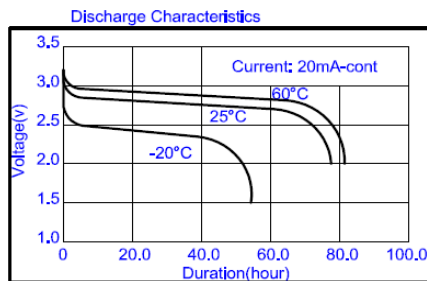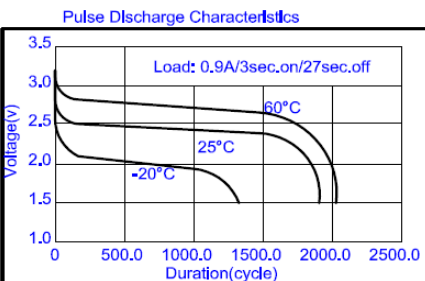

**max. discharge current**  
 continuous: 1000 mA  
 pulse: 3000 mA

**internal resistance:** ≤ 0.5 Ω sine wave AC method (1kHz; 0.1mA)  
 according to IEC 896-2

**shelf life:** 10 years under proper storage conditions


**ambient temperature range:**  
 - 20...60 °C operating temperature  
 - 20...45 °C storage temperature  
 5...20 °C recommended storage temperature

**relative humidity:** ≤ 70% during storage

**mechanical specifications**

**cell dimensions**  
 diameter: 17.0 - 0.7 mm  
 height: 34.5 - 1.0 mm  
 weight: 16.5 ± 2 g

**blister card**  
 dimensions: 123 x 86 mm  
 weight (incl. battery): 25 g



	<b>ANSMANN Specifications for model:</b>	<b>CR-123A Lithium Battery</b>
		<b>1pcs blister package</b>
	data sheet no. / part no.	5020012
	supplier no.	703331
	author / date	TG / 19.01.2018