
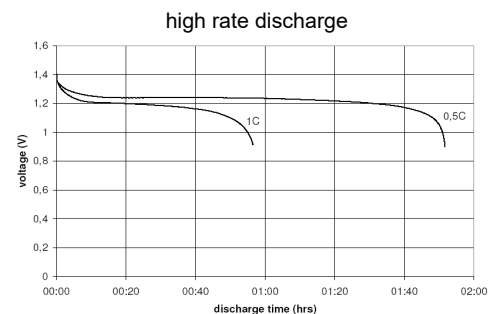
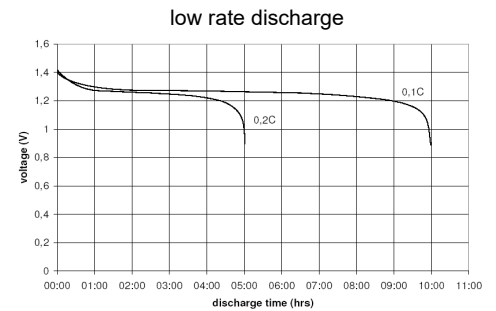
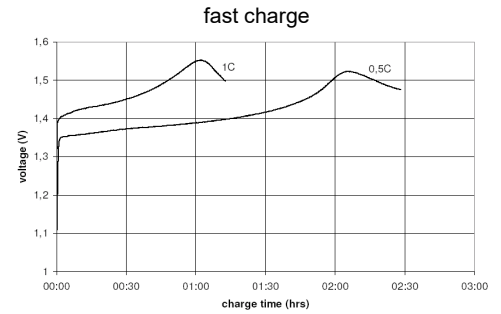


		Conditions
<b>cell type:</b>	NiMH	
<b>cell size:</b>	C	
<b>nominal voltage:</b>	1.2 V	
<b>max. charge voltage:</b>	1.5 V	at standard charge (0.1C / 20°C)
<b>capacity</b>		
nominal:	4500 mAh	discharge at 0.2C
minimum:	4500 mAh 4200 mAh	discharge at 0.2C discharge at 1C
		1.0V end discharge voltage ta: 20°C
<b>max. continuous discharge current:</b>	6750 mA	ta: 0...45°C
<b>charge</b>		
standard charge:	current 450 mA	time 14....16hrs
quick charge:	1350 mA	4hrs
fast charge:	2250 mA	2.3hrs
recommended charge termination control parameters:	0...5 mV 0.8...1 °C 45...50 °C	- ΔV (-deltaV) temperature rise per minute TCO (temperature cut off)
trickle charge current:	45...150 mA	(recommended)
continuous overcharge: (less than 1 year)	≤ 450 mA	no conspicuous deformation no leakage
<b>internal resistance:</b> (impedance)	≤ 20 mΩ	at 1KHz battery fully charged
<b>life expectancy:</b>	≥ 500 cycles	acc. IEC standard
<b>self discharge</b>		
charge retention:	≥ 80 %	after 12 months storage at 20°C
<b>initial capacity:</b>	≥ 3150 mAh	within 30 days after delivery discharge at 0.2C
<b>ambient temperature range:</b>	0...45 °C 10...40 °C - 20...65 °C - 20...50 °C - 20...40 °C - 20...30 °C	standard charge fast charge discharge storage (≤3months) storage (≤6months) storage (≤24months)
QCT1:	20/4300/20	
QCT2:	30/4200/20	

**Diagrams**

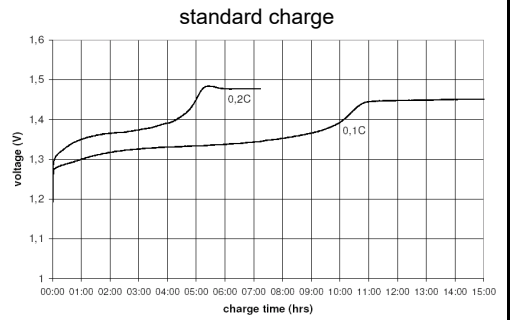


**mechanical specifications**

cell dimensions

diameter d1:	25.6 - 1.0	mm
diameter d2:	max. 7.5	mm
height h1:	50.0 - 2.0	mm
height h2:	min. 1.5	mm
weight:	80 ± 4	g

blister card dimensions:	123 x 85	mm
blister card weight (incl. batteries):	168	g



	<b>ANSMANN Specifications for model:</b>	<b>C - 4500mAh low self discharge 2pcs blister package</b>
	data sheet no. / part no.	5035352
	supplier no.	701364
	author / date	TG / 12.06.2018