

Data Sheet Model No.: GP357

Description : Silver Oxide High Drain Button Cell

Nominal Voltage : 1.55 Volts

Nominal Dimensions: Ø11.60 X 5.40mm

Applications : Calculator, Hearing aid, lighter,

electronic toy, camera, etc.

Average Weight : 2.3g

Shelf Life : Not less than 90% of the


service capacity, following 1st year storage at 20°C.

Date Code : Unless otherwise specified,

each cell will carry a numeric year code and an alphabetical


month code.

Nominal Service Life : 165 hrs (at $1.5k\Omega$ Load) (to 1.2V at $20^{\circ}C$) 230 days (at $50k\Omega$ Load)

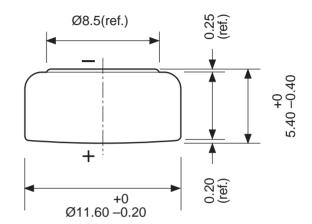

Unit: mm

Typical Discharge Characteristics at 20°C

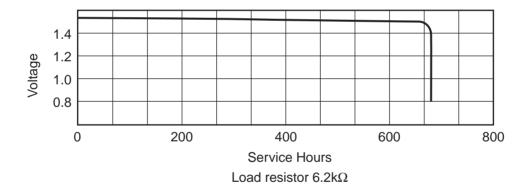

Average Service Capacity: 165 mAh (rated capacity at $6.2k\Omega$ load, cut off voltage 1.2V at $20^{\circ}C$)

Close circuit voltage:

1.30 Volts (min.) (load resistor 100Ω at

20°C for 1 to 2 seconds)

Cross Reference:

IEC	JIS	EVEREADY	VARTA	DURACELL	PANASONIC	SONY
SR44	SR44	357	V357	D357	SP357	SR44SW