

Datasheet LSA-1200AAP

Primary Lithium battery 3.6 V / 1.2 Ah

Type: LSA-1200AAP / 034000302

IEC: 1/2AA – ER14250

System: Lithium Thionyl Chloride LiSoCl₂ - Bobbin

Issued	Checked	Approved
S.Ménières PM		P.Blanc CTO


Leclanché SA – Head Office

Avenue des sports 42
CH-1400 Yverdon les Bains - Switzerland
Tel. +41 (0) 24 424 65 00
Fax. +41 (0) 24 424 65 20
E-Mail: integration@leclanche.com
www.leclanche.com




Specifications (Typical values for cells stored for one year at 20°C)	
Nominal capacity (NC)	1.2 Ah (at a discharge current of 1 mA, T° 20°C cut-Off voltage at 2.0V)
Nominal open circuit Voltage	3.67 V
Max continuous current	50 mA
Max pulse current	100 mA (0.1s drained every 3 minutes at 20°C) Yield voltage readings above 3.0 V. The readings may vary according to the previous story of the cell, temperature and pulse form. An assistance with capacitor may be advised, please consult Leclanché for product design.
Operating Temp	-55°C to +85°C
Weight	9 g
Volume	4.3 cm ³
Diameter	14.5 mm max
Height	25.1 mm max
Lithium metal content	Approx 0.3 g
UN Class	NC
General characteristics	
Hermetic glass-to-metal sealing	
Low self-discharge rate	< 2% per year at room temperature
Long shelf life	over 10 years (without load at room temperature of 20°C)
High energy density	up to 700 Wh/Kg
Non flammable inorganic electrolyte	
High and stable operating voltage	
UL approval and ISO 9001 certified company	
Broad temperature range	-55°C to +85°C


Dimensions in mm

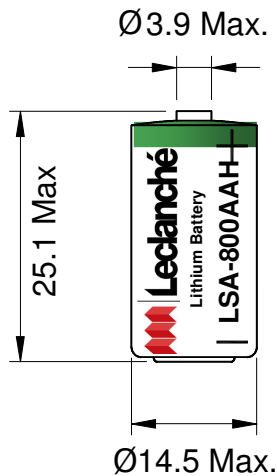


Operating voltage

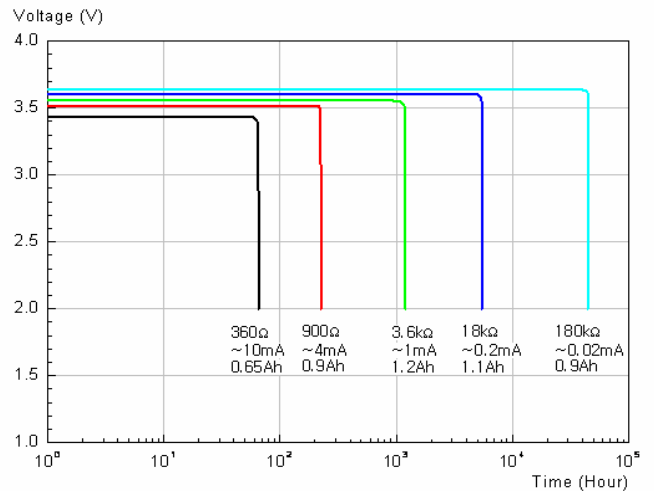

Capacity vs Current

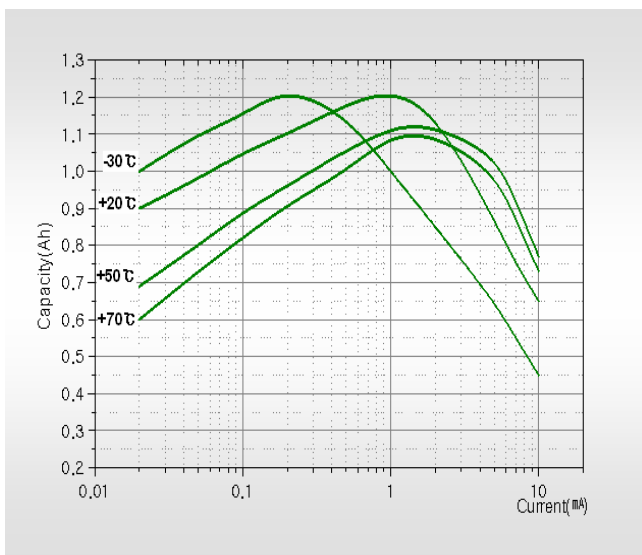

Discharge characteristics at 20 °C

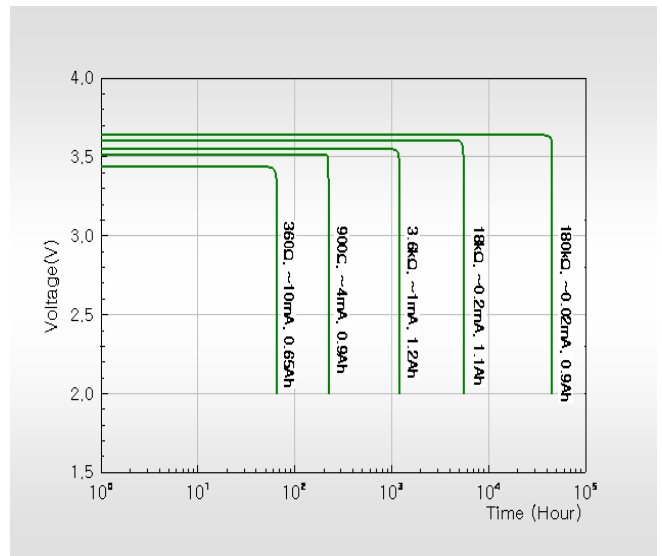

Warning

- Fire and explosion and severe burn hazard
- Do not recharge or short circuit
- Do not crush, disassemble, heat above 150°C (262°F)
- Do not incinerate or expose contents water
- Dispose of used battery promptly
- Do not solder directly to cell, use terminals
- Cell should be stored in a clean, cool (+25°C max), dry and ventilated place.

Available terminals:

- Solder tags
- 2 or 3 pins radial
- Axial leads
- Wire with connector
- Etc...

Important information:

This datasheet contains typical information specific to products manufactured at the time of its publication and does not constitute a guarantee or warranty with respect to any cells and batteries. Cell/Battery performance and service life depend on the operating temperature, storage conditions, cut-off voltage and load applied in a specific application. It is the responsibility of each user to ensure that each application is adequately designed in terms of safety and usage conditions and is in conformance with existing standards and requirements. All specifications are subject to change without notice.