



Model No.: **GP29AF**

Description	: Mercury Free & Lead Free Alkaline High Voltage Multicell
Nominal Voltage	: 9Volts
Nominal Dimensions	: Ø8.0mm×21.9mm
Terminal	: Nickel plated flat contacts - protruded red(+); recessed black (-)
Jacket	: Metal jacket
Internal Connection	: Pressure
Applications	: Remote controller
Average Weight	: 3.5g
Date Code	: Unless otherwise specified, each batteries will carry a numeric year code and analogue month code (-)
Shelf Life	: Not less than 90% of the service capacity within first year storage at 20 ± 2°C 55 ± 20 %RH
Insulation	: 5MΩ min.
Resistance	
Close Circuit Voltage	: 8 Volts (min.)(load resistor 2.4kΩ at 20 ± 2 °C for 0.1 to 2 seconds)
Current Drain	: Under 15mA pulse, 0.5mA continuous
Nominal Service Life	: 34hrs (at 15kΩ load) (to 4.5V at 20 ± 2 °C)
Average Service	: 18mAh(at 15kΩ load)
Capacity	(to 4.5V at 20 ± 2 °C)

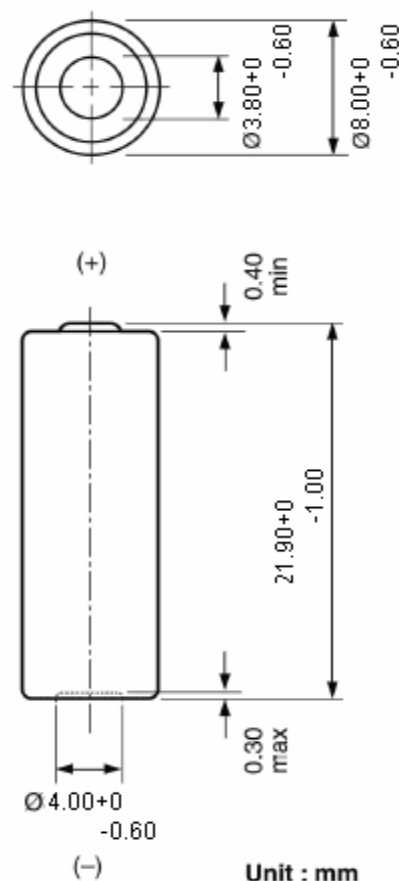

Typical Discharge characteristics at 20 ± 2 °C

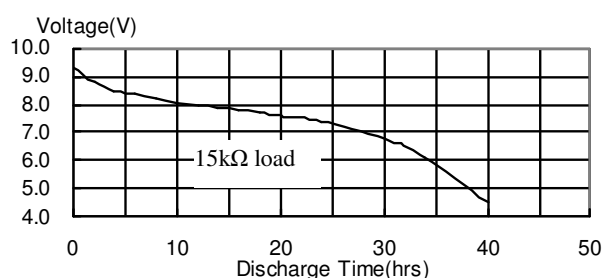

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.

Cross References:

GP	Eveready	Duracell	Varta
29AF	---	---	---