KODAK Products

Product Data Sheet


Effective: 07/01/2021

D-01-103-20

KODAK Xtralife Alkaline Battery KC

https://www.mega-piles.com/



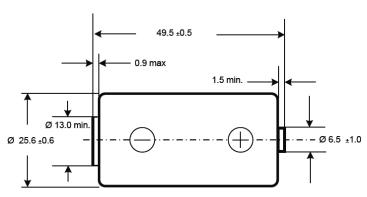

Dimensions are in millimeters and include label.

Chemical system: Alkaline, MnO₂ / KOH / Zn

Designations: IEC LR14, ANSI 14A

Nominal Voltage: 1.5V

Nominal Capacity: 7000mAh at 39 Ohms to 0.8 Volts

Internal Impedance: 0.10 Ohms (typically)

Average Weight: 70 g

Average Volume: 26.6 cm³

Recommended storage temperature: 10 – 25 °C, RH no more than 75%

Operating temperatures: -20 – 54 °C

Reaction: $2 \text{ MnO}_2 + \text{Zn} + \text{H2O} \rightarrow 2 \text{ MnOOH} + \text{ZnO}$

Terminals: Flat contacts, protruding negative

Jacket: Aluminium label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) SDS sheets are available on request from Strand Europe Ltd.

