

Technical specifications



Alkaline


<https://www.mega-piles.com>
email : admin@mega-piles.com
Panasonic Pro Power AA X4

Pro Power

Panasonic Typical Dimensions



LR6

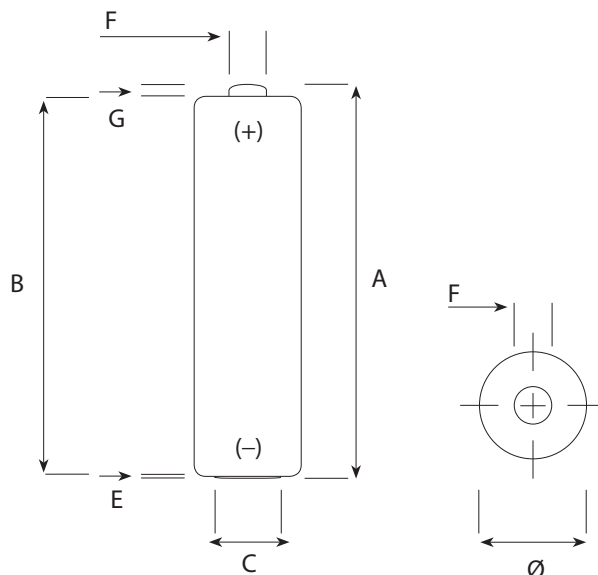

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,5	
B		49,2
C		7,0
E	0,5	
F	5,5	
G		1,0
Ø	14,5	13,5

Specifications

Name	LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	23,3 g
Storage temperature range	+10°C ~ + 25°C
Operating temperature range	-20°C ~ + 45°C
Average Impedance	+/- 105 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation Nordic ecolabeling (white Swan) EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell

For more information:


www.panasonic-batteries.com

Panasonic
ideas for life


Typical discharge values

LR6


Radio: 4h/d 43 ohm end 0,9 V

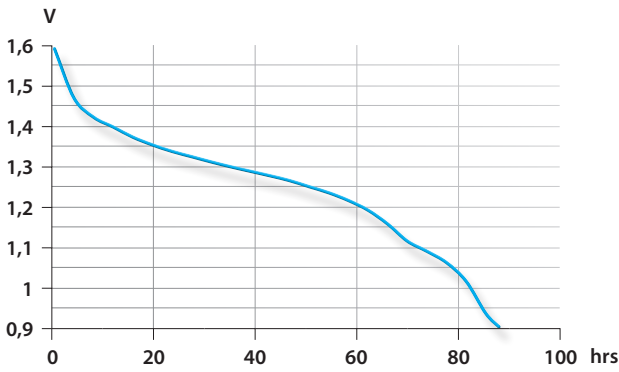


Recorder: 1h/d 10 ohm end 0,9 V

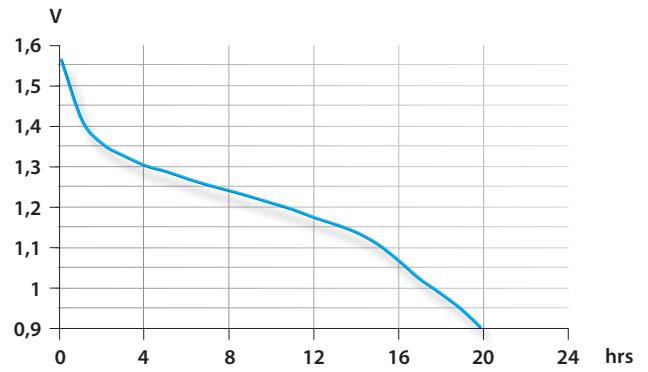


Motor: 1h/d 3,9 ohm end 0,8 V

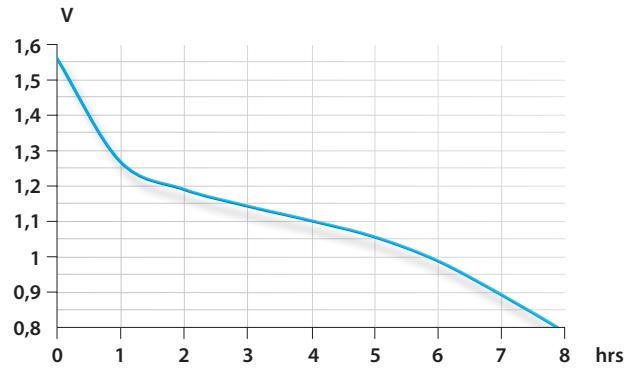


Remote Control: 15s/m 8h/d 24 ohm end 1,0 V

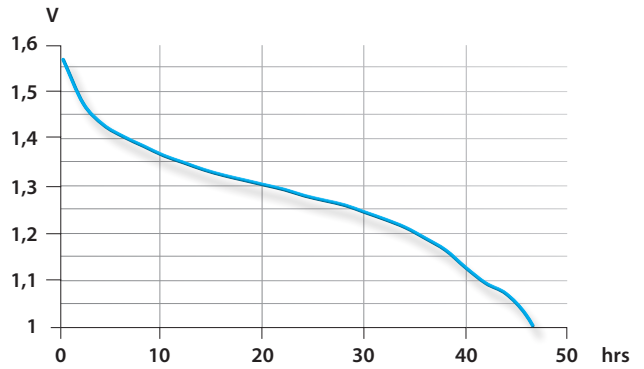


Photoflash: 10s/m 1h/d 1000 mA end 0,9 V

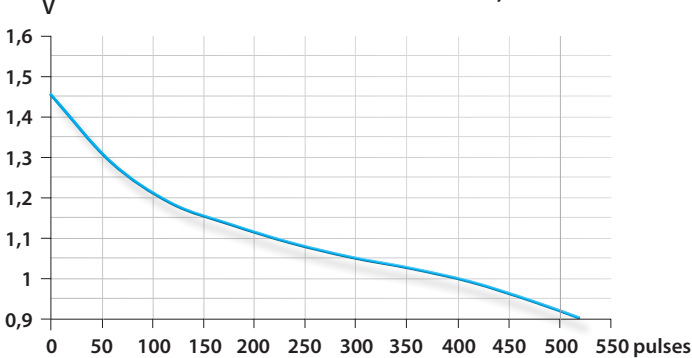

CD/MD: 1h/d 250 mA end 0,9 V

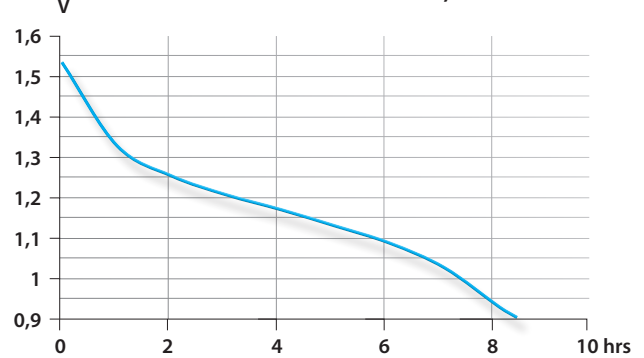

**DSC: 10x(2s 1,5W/28s 0,65W)
5min on/55min off, 24h/d end 1,05V**

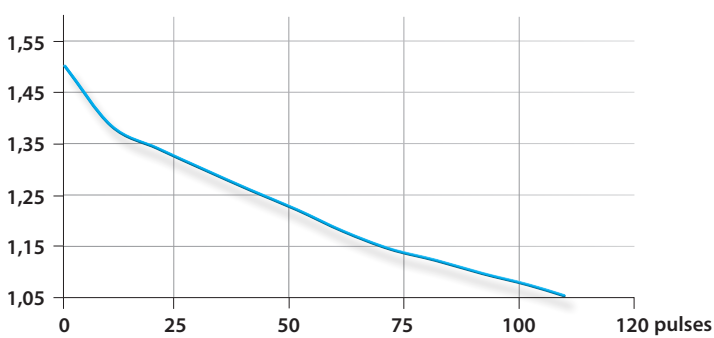

Copyright© Panasonic Energy Europe N.V. ("PECE") 2010 - All rights reserved. The information contained herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy or the results to be obtained from the use of such information. Test results are strictly according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change. 01/2010.

Promoter: Panasonic Energy Europe N.V., P. Celis, Brusselsesteenweg 502, 1731 Zellik, Belgium

For more information: www.panasonic-batteries.com